

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
6 January 2005 (06.01.2005)

PCT

(10) International Publication Number  
WO 2005/000684 A3

(51) International Patent Classification<sup>7</sup>: B41J 2/175

(21) International Application Number:  
PCT/JP2004/009051

(22) International Filing Date: 21 June 2004 (21.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2003-180911 25 June 2003 (25.06.2003) JP  
2003-289943 8 August 2003 (08.08.2003) JP  
2003-294914 19 August 2003 (19.08.2003) JP  
2003-294861 19 August 2003 (19.08.2003) JP

(71) Applicant (for all designated States except US): RICOH  
COMPANY, LTD. [JP/JP]; 3-6, Nakamagome 1-chome,  
Ohta-ku, Tokyo 1438555 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): HORI, Eisuke  
[JP/JP]; 2-21-405, Nakamagome 2-chome, Ohta-ku,

Tokyo 1430027 (JP). TOKUNO, Toshiroh [JP/JP];  
2-14-A-1, Azaminominami 2-chome, Aoba-ku, Yoko-  
hama-shi, Kanagawa 2250012 (JP). KANEKO, Tetsuya  
[JP/JP]; 19-24-508, Higashihongoh 6-chome, Midori-ku,  
Yokohama-shi, Kanagawa 2260002 (JP). SATOH, Kenji  
[JP/JP]; 2344-14, Iriya 5-chome, Zama-shi, Kanagawa  
2280024 (JP).


(74) Agent: ITOH, Tadahiko; 32nd Floor, Yebisu Garden  
Place Tower, 20-3 Ebisu 4-chome, Shibuya-ku, Tokyo  
1506032 (JP).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG,  
KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,  
MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,  
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN,  
TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: LIQUID CONTAINER, SUB TANK, LIQUID DISCHARGE APPARATUS, LIQUID SUPPLY APPARATUS, AND  
IMAGING APPARATUS

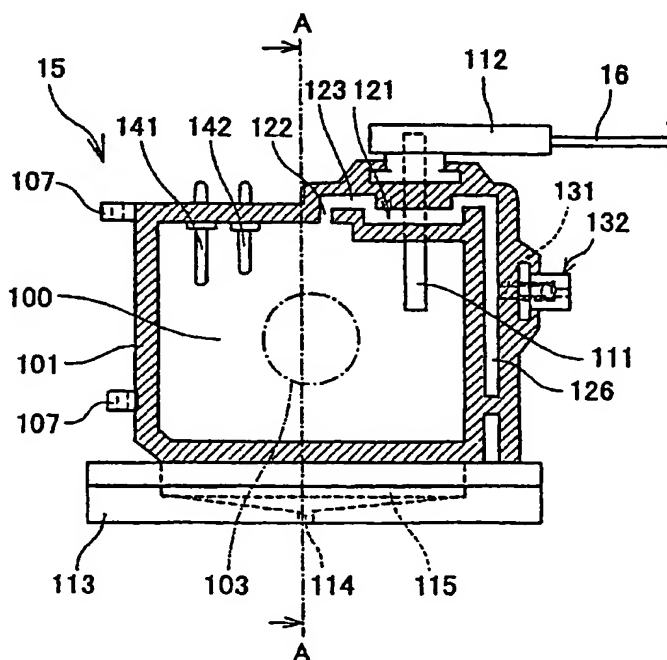

(57) Abstract: A sub tank is provided that includes a case at which an air flow path is formed, the air flow path including an entrance  
flow path portion that is connected to an ink accommodating portion of the case, and a cross flow path portion that continues from  
the entrance flow path portion. The cross flow path portion extends in an upper diagonal direction with respect to a reference plane  
corresponding to the ink liquid level at a standstill state.

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*